

NOTES:




1. SUBSTRATE: FLOAT GLASS

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: BBAR (425-700nm)  
R(AVG) ≤0.5% @ 425 - 700nm

 FINE GRIND SURFACE


4. ROHS COMPLIANT

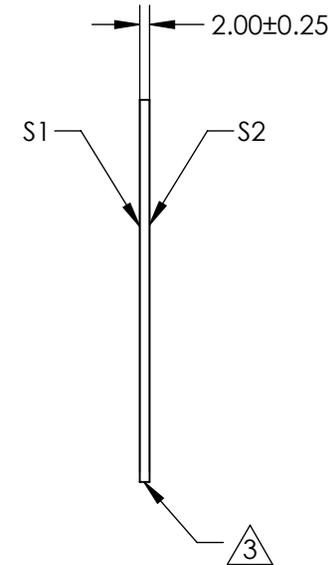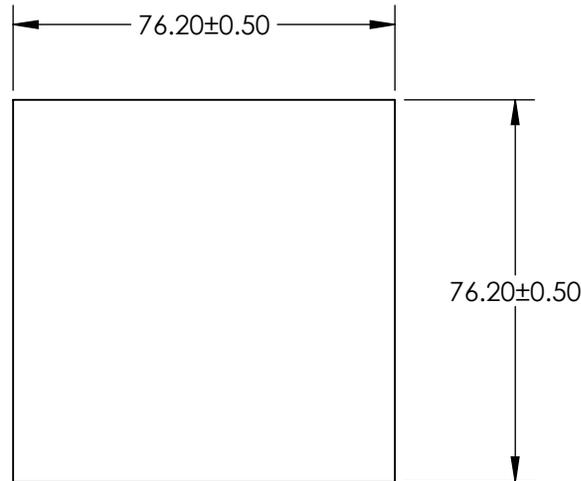

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80 - 50	80 - 50
CLEAR APERTURE	68.58 x 68.58	68.58 x 68.58
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 <sup>®</sup> Edmund Optics<sup>®</sup>

TITLE

76.2 x 76.2 x 2mm High Efficiency Window

DWG NO

71596

SHEET  
2 OF 4