

NOTES:

1. SUBSTRATE:
N-BK7




2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: NIR I (600-1050nm)
R(avg) ≤0.5% @ 600 - 1050nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. ROHS COMPLIANT

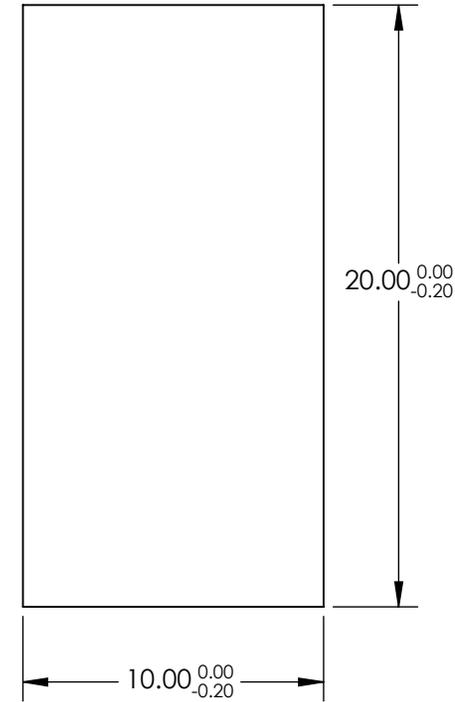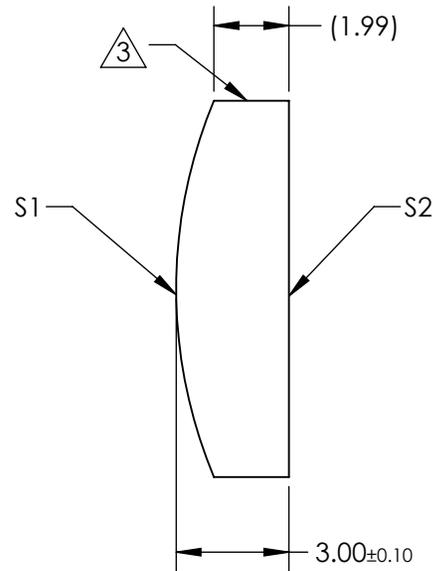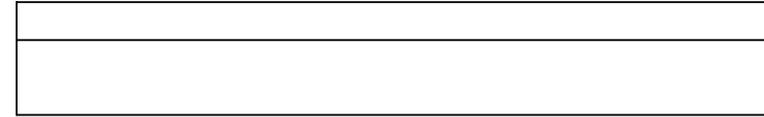

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL	25.00		Edmund Optics® 10mm H x 20mm L x 25mm FL NIR I Coated, Illumination Grade PCX Cylinder Lens	
SHAPE	CONVEX	PLANO	BFL	23.02			
RADIUS	12.92	∞	THIRD ANGLE PROJECTION		TITLE		
SURFACE QUALITY	60 - 40	60 - 40					
CLEAR APERTURE	9.00 x 19.00	9.00 x 19.00	ALL DIMS IN	mm	DWG NO	25488	SHEET 4 OF 16
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					