NOTES:

1. SUBSTRATE:

OPTICAL GRADE GLASS

2. BANDWIDTH: 14nm


3. BLOCKING WAVELENGTH RANGE: 330 - 900nm

4. MINIMUM TRANSMISSION (%): >93 @ 603 - 617nm

5. ROHS COMPLIANT

NOTE: ARROW ON RING INDICATES PREFERRED DIRECTION OF PROPAGATION OF LIGHT.



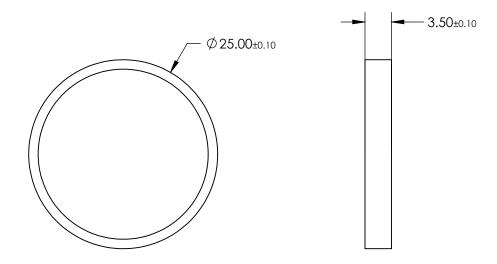

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	S2	
SHAPE	PLANO	PLANO	
CONE HALF ANGLE (°)	7	7	
OPTICAL DENSITY OD (AVERAGE)	>5	>5	
SURFACE QUALITY	80 - 50	80 - 50	
CLEAR APERTURE	≥∅10.00	≥Ø10.10	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

	Edmund Optics®					
	THIRD ANGLE PROJECTION		TITLE	610nm CWL, >OD5, 20nm FWHM Bandpass Filter, 25mm Dia.		
)	ALL DIMS IN	mm	DWG NO	78437	SHEET 28 OF 52	