
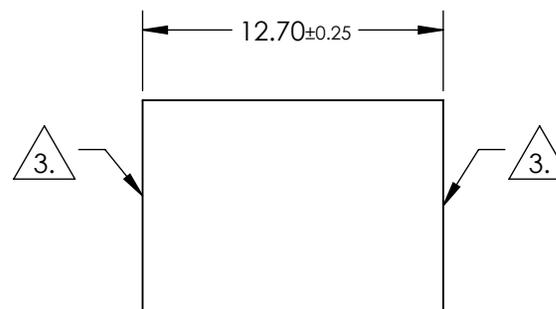
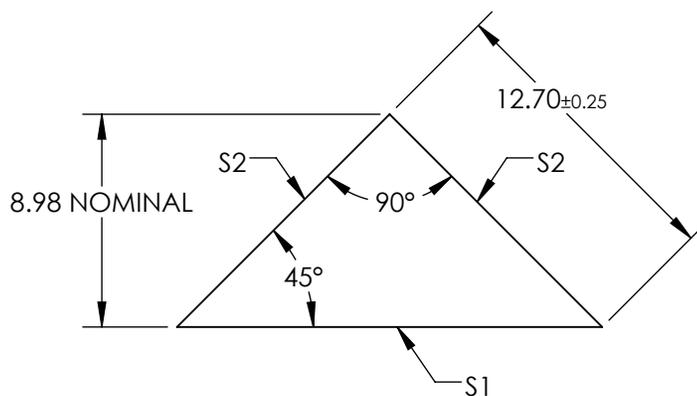


NOTES:

1. SUBSTRATE : Calcium Fluoride (CaF₂)
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: Uncoated
 - S2: Uncoated

3. FINE GRIND SURFACE

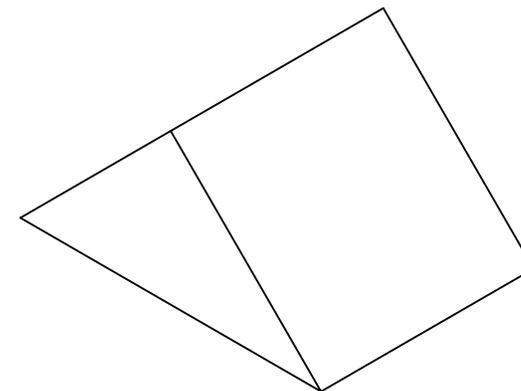

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
CLEAR APERTURE	85%	85%
ANGLE TOL. (arcmin)	±10	±10
SURFACE QUALITY	40-20	40-20
SURFACE FLATNESS	2λ	2λ
WAVELENGTH RANGE (nm)	200 - 7000	200 - 7000
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

EO® Edmund Optics®

TITLE

Calcium Fluoride, 12.7mm, Uncoated, IR Right Angle Prism

DWG NO

19706

SHEET
1 OF 1